



DC12

DOUBLE-COLUMN TYPE 5-AXIS
VERTICAL MACHINING CENTER



WE ARE AXILE

AXILE designs and builds agile smart 5-axis VMCs with leading automation solutions for manufacturers of complex parts and components.

“ We believe manufacturers shouldn’t have to choose between high-speed and high-performance 5-axis machines. ”

By combining sheer agility, digitalized intelligent automation, and a new standard of 5-axis machining, we’ve created an all-new approach:

Agile Smart Machining.

In short, our dedicated team of industry experts brings together ultra-high removal rates, pinpoint precision, and 24/7 automation and reliability within each and every AXILE 5-axis machine.

Our breakthrough design concepts and advanced proprietary technologies serve highly sophisticated manufacturers of complex parts and components for applications in aerospace, die and mold, medical, and general job shop, among others.

The AXILE service and support network spans nearly 50 countries, with more than 70 distributors across Asia, Europe, and the Americas, and a service center in Croatia.



CONTENTS

4 DC12 DOUBLE-COLUMN TYPE VMC

DESIGN CONCEPT

AGILITY

ACCURACY

SPINDLE

CHIP MANAGEMENT

TOOL MANAGEMENT

ERGONOMICS

CONTROL UNIT

14 STANDARD & OPTIONAL EQUIPMENT

16 TECHNOLOGIES

ART™

SMT™

19 LAYOUT AND WORKSPACE

20 TECHNICAL DATA

DC12 DOUBLE-COLUMN TYPE VMC

The DC12 is the most robust VMC in AXILE's arsenal, perfectly suited for handling larger, lengthy workpieces. With a maximum table loading weight of 2.5 tonnes and maximum diameter of 2,200 mm X 1,200 mm, the DC12 takes on the larger, heavier parts common in the aerospace, power generation, and die and mold industries. Its double-column bridge construction allows for greater rigidity, as well as greater control over thermal deformation. As a result, the D12 is capable of deep cuts and complex contouring while maintaining utmost precision.

With larger workpieces come more chips, meaning the DC12 features excellent chip removal efficiency, to prolong tool life and ensure no residual interference. Therefore, the DC12 delivers the high surface quality expected by leading manufacturers.



DESIGN CONCEPT

THE STRUCTURE

1

Spindle swiveling within the head and moved by Y & Z bridge axes

The swiveling spindle enhances tool accessibility to complex parts features

4

4-guided Z-axis Box-in-Box RAM

Ensures highest rigidity of the long RAM to absorb the machining vibration

2

Bridge design

Same stability in all travels of X and Y axes
Excellent accessibility to working area

5

Massive bridge supported on a one-piece base

Best linear-axis geometry and long-term stability

3

3-guided Y-axis carriage

Highest stability and accuracy even in roughing processes with high torque in spindle

6

All body made of high-quality casting


Homogeneous thermal behaviour

Optimal damping of machining vibrations

7

Integrated chip disposal channel directly under the table

Quick evacuation of chips for high chip volume machining

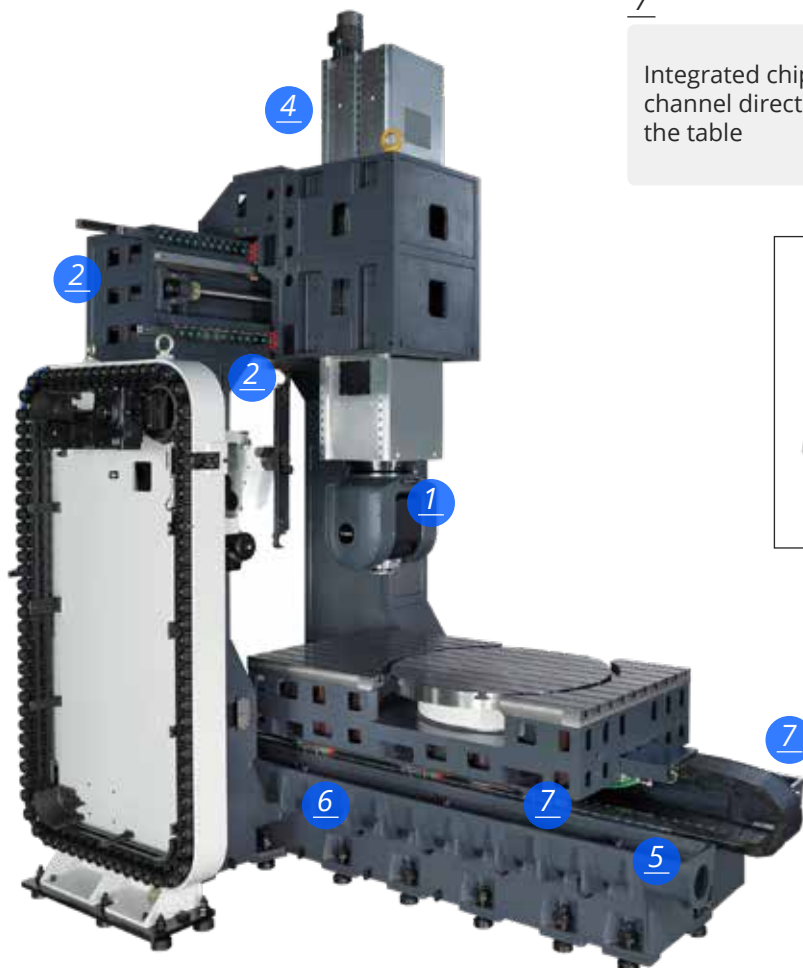

3-guideway Y-axis



Box-in-Box RAM

AGILITY

LINEAR AXES

1

Direct driven servomotors (no belts/gears)

Best dynamic and minimal elasticity in the driving system

2

Linear scales with 0,1 μm resolution in X, Y and Z axes

Ensures best accuracy for ALL axes

Roller type linear guideways


Best high-feed movement and vibration damping

Pre-loaded double-nut ballscrews

Minimized backlash allowing high-feed movements



SWIVELLING-ROTARY AXES



Integrated and ready-to-use hydraulic and pneumatic ports for the rotary C-axis table

Simplifying parts clamping process

Table: Torque motor-driven rotary axis (C)

Highest dynamics

Head: Dual torque motor-driven swiveling axis (B)

Highest accuracy

Swivelling head vs Rotary table

K: B axis (HSK-A63/100) Torque S1 (Nm)
 K: C axis Torque S1 (Nm)
 T: B axis (HSK-A63/100) Torque S1 (Nm)
 L: C axis Torque S1 (Nm)

1100
 1940
 1158
 2000

Hydraulic brake

High-repeatability in 4+1x operation when using the brakes

High-resolution, direct absolute rotary measuring system

Zero-backlash and high accuracy



Swivelling B-axis head



Rotary C-axis table


ACCURACY

THE CORNERSTONE OF 5-AXIS MACHINING

Linear axes accuracy

Ballscrew's thermal growth

0.1 μ m resolution
absolute linear scales in
ALL axes

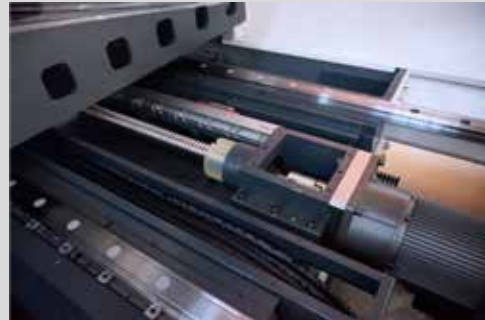

Rotary axes accuracy

Elasticity and backlash of
driving system

Direct-driven torque
motors with no backlash

Angular error is
multiplied by the distance
from rotary axis to
machining point

+/- 5" accuracy absolute
rotary scale feedback



Thermal control

Heat generated by
spindle and torque
motors

Spindle and torque
motors are cooled with a
water chiller close-circuit
and a cooling unit



Linear-rotary axes relative positioning

The swivelling-rotary
table might shift its
relative position to the 3
linear axes by many
reasons generating an
increasing error in the
part

CNC embedded
compensating functions
like Kinematics
(Heidenhain), Kinematic
chain (Siemens) and
Tilted working plane
indexing (Fanuc)




SPINDLE

HIGH-PERFORMANCE BUILT-IN SPINDLE SELECTION




Spindle K

- > 20.000 rpm
- > HSK A63
- > Power 45/45 kW (S1/S6-40%)
- > Torque 130/160 Nm (S1/S6-40%)

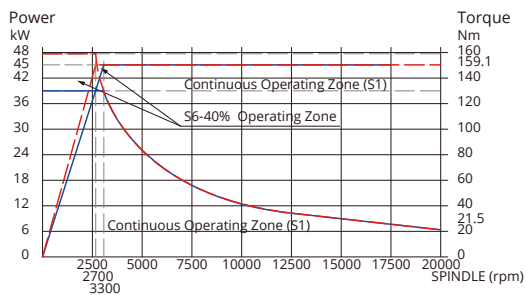


- > 16.000 rpm
- > HSK A100
- > Power 40/40 kW (S1/S6-40%)
- > Torque 150/180 Nm (S1/S6-40%)

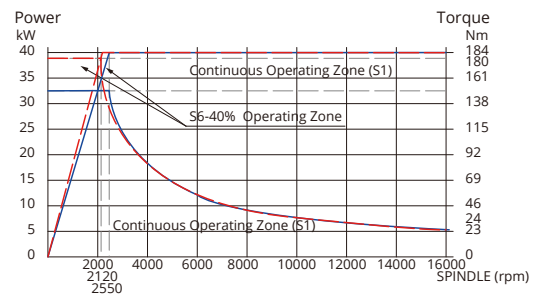


Spindle T

- > 20.000 rpm
- > HSK A63
- > Power 60/65 kW (S1/S6-40%)
- > Torque 120/151 Nm (S1/S6-40%)

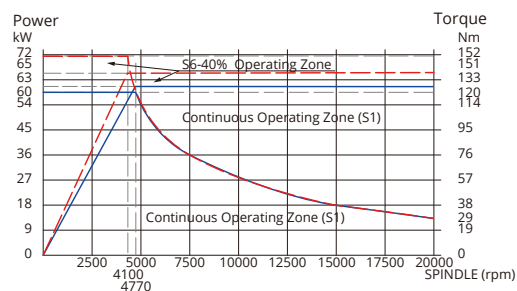

- > 16.000 rpm
- > HSK A100
- > Power 46/55 kW (S1/S6-40%)
- > Torque 174/241 Nm (S1/S6-40%)

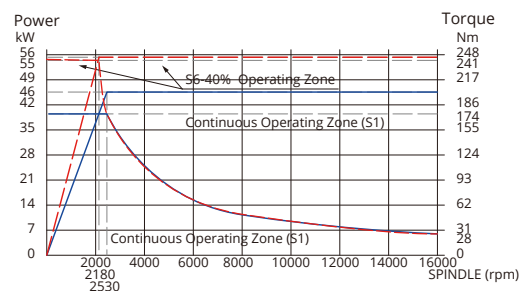

CHIP MANAGEMENT

FLUSHING CHIPS AWAY



There are two screw-type chip augers provided at both sides of the base

During cutting, the chips are delivered through chip augers to a chip conveyor for easy chip removal

- 1 Chip auger
- 2 Chip conveyor
- 3 4x coolant at spindle nose
- 4 Coolant through spindle
- 5 Air flushing
- 6 Chip wash down



TOOL MANAGEMENT

TOOL MAGAZINE SELECTION FOR EVERY APPLICATION

1



2



1

Chain type ATC
HSK-A63 tool shank: 90 or 120 tools
HSK-A100 tool shank: 60 tools

Sister tools, complex parts and unmanned operation can be executed with no worries on the tool magazine capacity.

2

Matrix type magazine for 216 HSK-A63 tools

Maximum tooling availability to reduce work preparation time and increase flexibility

Ideal configuration for high-tech job-shops and high-volume production companies

Tools are accessible from the back-left side of the machine and stored with an assisted drawer

Tools can be easily changed during automatic operation in the same area for machining supervision, CNC panel and workpiece loading and unloading.

Smart tool: interface panel is used to select the tool. When finished, the system checks whether all tool HSK-A63 holders are in the right position

Avoid human failures when manually change tool to spindle, protecting spindle and reducing down-time.

Chain-type magazine with 60, 90 or 120 tools capacity



ERGONOMICS

ACCESSIBILITY TO WORKING AREA

Integrated roof for overhead crane loading and unloading

Large front door opening


Comfortable access to working area for workpiece preparation and supervision

Rotary table at same level as fixed table

Ergonomic loading and work preparation

Integrated roof to open ceiling working area

Easy loading and unloading of heavy and bulky workpieces by over head crane

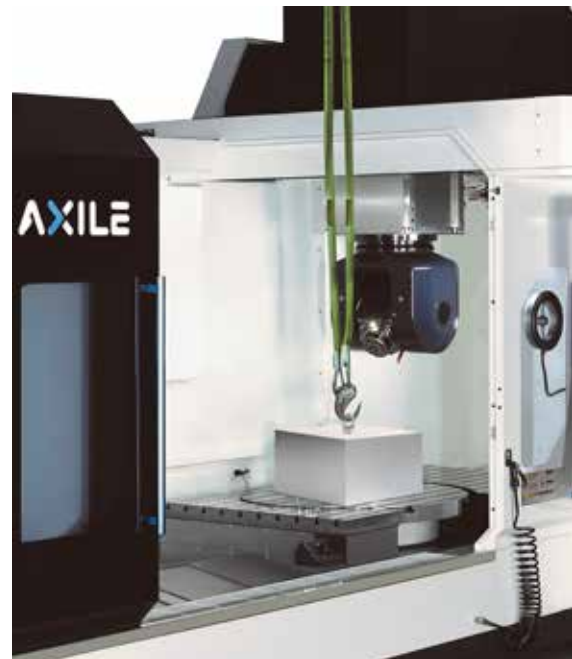

EASIER TOOLING MANAGEMENT AND MAINTENANCE



Tools are accessible from back of the machine

Tools can be easily changed during automatic operation

All necessary consumables are located together in the back of the machine

Easier routine maintenance for operator



Smart tool panel is used to select the tool and to check if all tool holders are in the right position when job is finished

Avoid human failures when manually change tool to spindle, protecting spindle and reducing down-time


CONTROL UNIT

A CONTROLLER FOR EVERY USER

Heidenhain TNC 640

- > Kinematics
- > Dynamic Collision Monitoring
- > Tool Center Point Management
- > Tilted the Working Plane

Heidenhain TNC 640

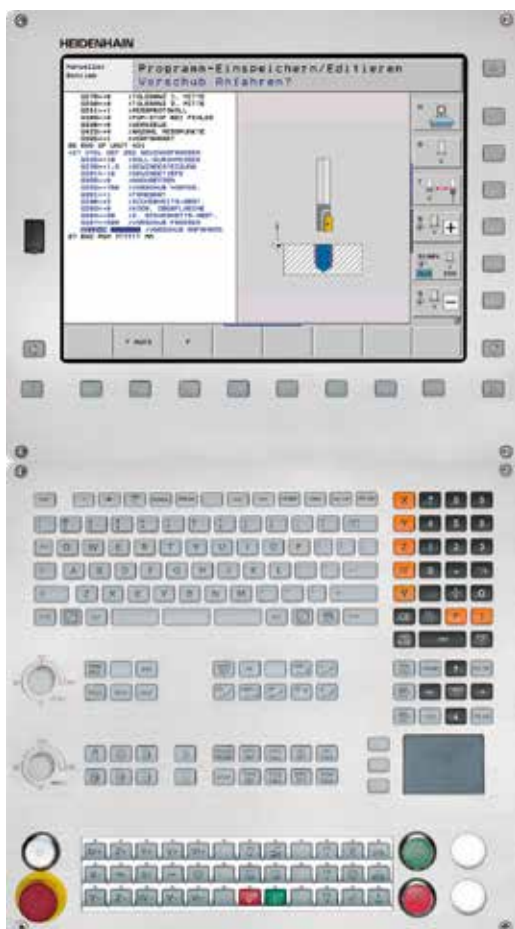

Siemens 840D SL/SINUMERIK ONE

- > Kinematics chain
- > Collision Avoidance
- > 5-axis transformation with tool orientation
- > Swivel the Coordinate System

Fanuc 31i-B5 plus

- > 3D Interference Check
- > High Speed Smooth TCP
- > Tilted Working Plane indexing

Siemens 840D SL



Fanuc 31i-B5 plus



STANDARD & OPTIONAL EQUIPMENT

Standard details of a premium machine

High efficiency air conditioner

Electrical cabinet is maintained at stable temperature by using an air conditioner



Dual chip auger, chain type chip conveyor and built in 40 bar paper filter are standard equipments



U-type embedded in the table (for highest accuracy)

Tools are measured by an additional laser tool measurement, in different angles.



Automatic workpiece measurement (with probe, receiver and reference ball)

Automatic compensation of the rotary axis relative positioning:
Kinematics (Heidenhain), Kinematic chain (Siemens) and Tilted working plane indexing (Fanuc)

For accurate workpiece positioning or in-process measuring of some machining features.



Customize the machine to your needs

Cooling unit:


- > CTS with 40 bar pump, paper filter and oil skimmer (STD)
- > CTS 70 bar separate type with paper filter and coolant chiller (OPT)
- > CTS 70 bar programmable separate type with paper filter and coolant chiller (OPT)

Recommended for high aluminum or cast iron material



Work Platform (opt)

Allows workers easily approach the working area

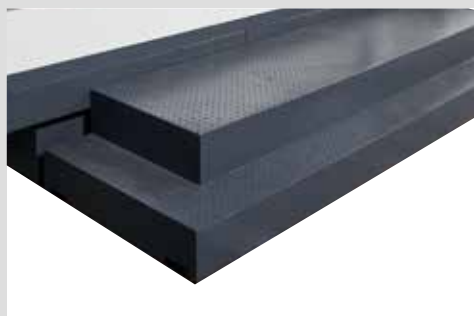

Spin window (opt)

Allows workers easily approach the working area



TECHNOLOGIES

ART™


INTELLIGENT MONITORING SYSTEM

The future of manufacturing depends on optimized, intelligent production. To gain an edge on the competition, embracing smart manufacturing is the best way to stay ahead of the curve.

To deliver agile smart machining, and that all-important competitive edge, we have created ART™, an intelligent monitoring system that enables 24/7 operations and eliminates unexpected downtime. ART™ monitors all wearing components, energy consumption, and fluids such as lubricant and coolant, to supply real-time status updates on the machine and its components, and to pre-empt future issues.

Utilizing ART™ in daily operations immediately improves production efficiency by empowering machinists to make informed decisions. Moreover, ART™ gives manufacturers the reassurance required to embrace automation solutions, by delivering vital oversight through total operational transparency.

ART™ framework

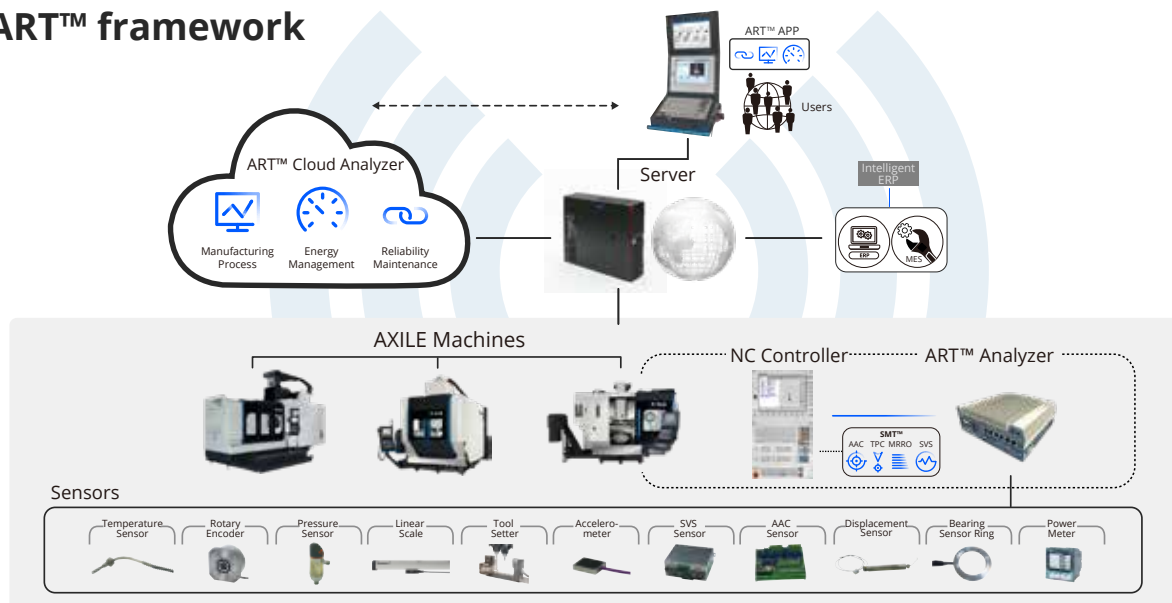

3 Core Functions to Boost Productivity & Profitability

Reliability Maintenance (RM)

Unexpected downtime is the enemy of profitability. ART™ delivers machine components diagnosis, machine lifetime estimation, and consumable supplies monitoring to pre-empt machine failure and eliminate unplanned downtime.


Manufacturing Process (MP)

Knowledge is power. ART™ achieves superior data collection and analytics on machine status and utilization rates, to deliver real-time information for optimized production strategies.

Energy Management (EM)

Every penny counts. ART™ enables manufacturers to monitor their power consumption, to identify ways to maximize energy efficiency and reduce expenditure.

Industry 4.0 Solutions to Intelligent Machine

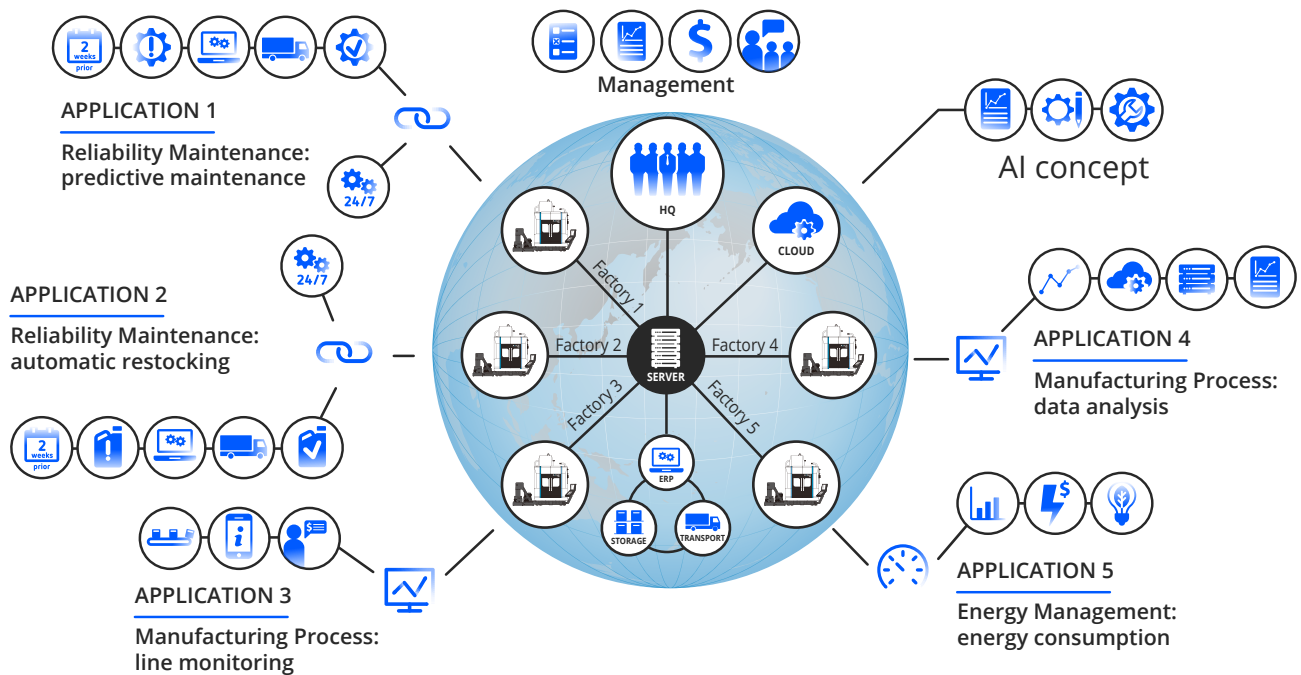


How ART™ Brings Production Benefits

- > Clearly displays machine status, for quick decision-making
- > Maximizes machine accessibility and utilization, for optimized production
- > Provides real-time notification of abnormal conditions, for swift intervention
- > Gives machinists the information required to optimize removal rates and machine lifetime

How ART™ Brings Maintenance & Service Benefits

- > Delivers pre-emptive error messages prior to breakdown, to eliminate unexpected downtime
- > Decreases service expenses, by precisely identifying the issue
- > Enhances service efficiency, by recommending appropriate action
- > Reduces spare parts inventory, by highlighting exactly what is needed and when
- > Automatically orders new parts, by linking to online purchasing system
- > Allows machines and equipment to remain on stand-by, always ready to work

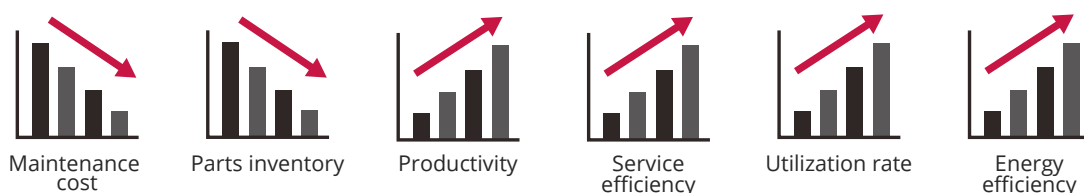

SMART MACHINING TECHNOLOGY

As pioneers of advanced mechatronic systems with decades of R&D expertise, AXILE has taken 5-axis CNC machining to the next level. Our patented SMT™ (Smart Machining Technology) delivers groundbreaking compensation and calibration functionality for unrivaled cutting speeds and industry-leading accuracy, and more importantly, resolves the aforementioned issues created by thermal expansion.


With AXILE's SMT™ manufacturers can have it all. There's no longer the need to choose between speed and precision, meaning manufacturers can produce superior parts rapidly, while also securing total process reliability and long-term machining performance.



Axial Accuracy Control



- > **AXIAL THERMO MONITORING**
Integration of temperature sensors and thermal error model
- > **HIGH PRECISION**
Thermal induced positioning error compensation

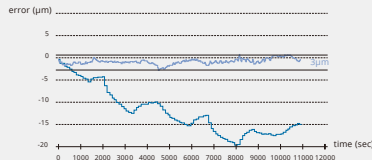


THERMAL ERROR BEFORE AND AFTER COMPENSATION
With thermal compensation system, the thermal error can be reduced from 20μm to 3μm.



Tool-tip Positioning Control



- > **HIGH ACCURACY**
Directly measuring expansion
- > **BETTER SURFACE FINISH**
5~6 times accuracy improved
- > **REAL-TIME COMPENSATION**
Electrical type sensor




With compensation, the displacement of tool tip is reduced from 65μm to 15μm.


ACCURACY IMPROVED 5~6 TIMES!



Spindle Vibration Supervision

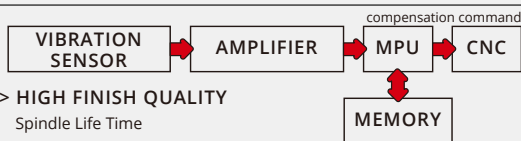


- > **HIGH FINISH QUALITY**
Spindle Life Time
- > **LONGER LIFE TIME**
Wear reduction on spindle bearings and tools
- > **EASY FOR MAINTENANCE**
Up to 12000 abnormal vibration data recording

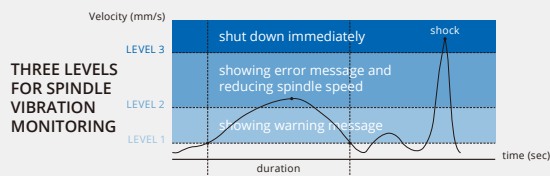


Metal Removal Rate Optimization

- > **OPTIMIZATION PRODUCTION**
Fully utilize machine capability
- > **EXTREMELY FAST PROCESSING TIME**
Maximization of metal removal rate
- > **HIGH TOOL DURABILITY & PERFECT SURFACE ROUGHNESS**
Stable cutting force and chatter-free machining
Surface Roughness improved **61.5%**
Spindle load decrease **13.6%**

LAYOUT AND WORKSPACE

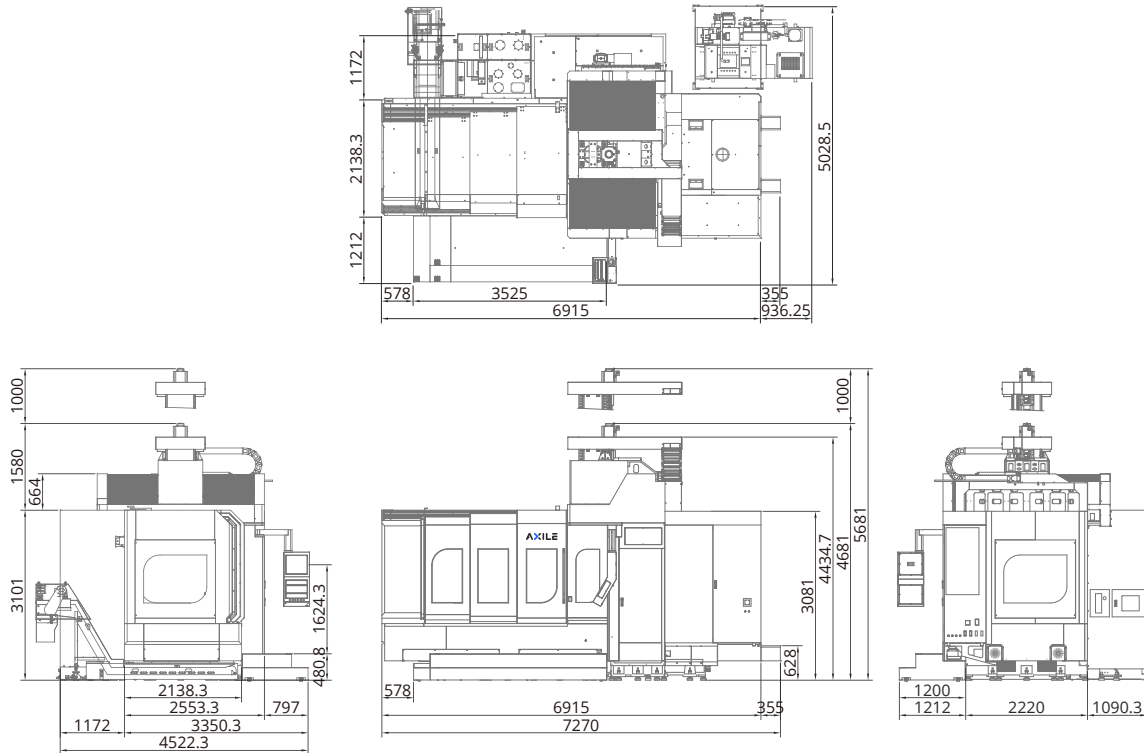

INTERFERENCE

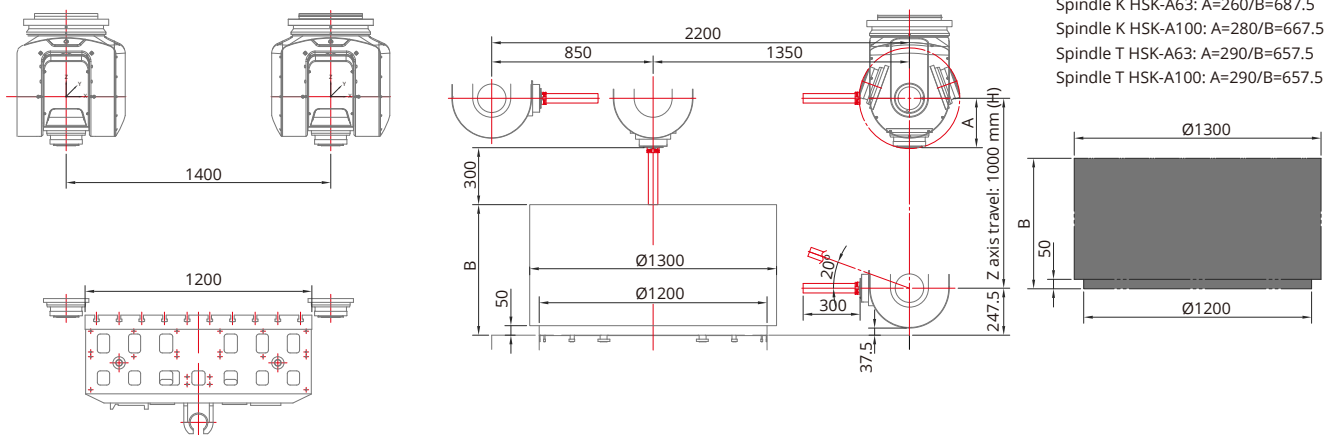

TECHNICAL DATA

COMMON DATA FOR DC12

TABLE		
Table size	2200x1200 mm	86.6x47.2 in
Maximun table load	2500 kg	5511 lbs
Rotary table top diameter	Ø1200 mm	Ø47.2 in
Total number of hydraulic and pneumatic ports	4	
LINEAR AXES		
X travel	2200 mm	86.6 in
Y travel	1400 mm	55.1 in
Z travel	1000 mm	39.4 in
Max feedrate X/Y/Z	36 m/min	1417 in/min
Guideways type	Roller	
Guideways size X/Y/Z	55/55/45 mm	2.1/2.1/1.7 in
ROTARY AXES		
Swiveling axis B - Head	±110 deg	
Rotary axis C - Table	360 deg	
Max speed axis B	100 rpm	
Max speed axis C	100 rpm	
SPINDLE K		
Spindle speed	20000 rpm(std) ; 16000 rpm(opt)	
Tool shank	HSK-A63 ; HSK-A100	
Power S1/S6-40%	45/45 kW(std)	60/60 hp(std)
	40/40 kW(opt)	53/53 hp(opt)
Torque S1/S6-40%	130/160 Nm(std)	95.9/118 Ft/lbs(std)
	150/180 Nm(opt)	110.6/132.7 Ft/lbs(opt)
SPINDLE T		
Spindle speed	20000 rpm(std) ; 16000 rpm(opt)	
Tool shank	HSK-A63 ; HSK-A100	
Power S1/S6-40%	60/65 kW(std)	80.4/87.1 hp(std)
	46/55 kW(opt)	61.6/73.7 hp(opt)
Torque	120/151 Nm(std)	88.5/111.3 Ft/lbs(std)
	174/241 Nm(opt)	128.3/177.7 Ft/lbs(opt)
MEASURING FEEDBACK		
Linear axes type	Linear scale	
Linear axes resolution	0.1 µm	
Rotary axes type	Rotary scale	
Rotary axis accuracy	±5"	
TOOL CHANGER		
Tool shank	HSK-A63 ; HSK-A100	
ATC type	Arm type	
Magazine positions	90T (std)/120T (opt) ; 60T	
Maximum tool length	500 mm	19.7 in
Maximum tool diameter (with adjacent pot empty)	150 mm(std) ; 229 mm(opt)	5.9 in(std) ; 9 in(opt)
Maximum tool weight	7 kg(std) ; 15 kg(opt)	15.4 lbs(std) ; 33.1lbs(opt)
Maximum loading weight	450 kg(std) ; 600 kg(opt)	992.1 lbs(std) ; 1322.8 lbs(opt)

* Specifications are subject to change without notice.

ACCURACY (VDI/DGQ 3441)		
Positioning	0.005 mm	0.0002 in
Repeatability	0.005 mm	0.0002 in
STANDARD THROUGH COOLANT SUPPLY (STD)		
High pressure pump	40 bar	580 psi
STANDARD THROUGH COOLANT SUPPLY WITH SEPARATE TANK (OPT)		
High pressure pump	40/70 bar	580/1015 psi
CONTROL UNIT		
Heidenhain	TNC 640	
Siemens	840D SL/Sinumerik one	
Fanuc	31i-B5 Plus	
DIMENSION		
Length (w & w/o conveyor)	8000 mm	26.2 Ft
Width	5100 mm	16.7 Ft
Height	5700 mm	18.7 Ft
Weight	28000 kg	61730 lbs
Floor Space	8000x5100 mm	26.2x16.7 Ft

* Specifications are subject to change without notice.



CNC SYSTEM SALES, INC.

R. Kent Baker
President

(317) 251-2770 Office
(317) 251-2888 Fax
(317) 431-7191 Cell
kbaker@cncsystemsales.com



AXILE MACHINE

E info@axilemachine.com

W www.axilemachine.com

©2021 AXILE. All rights reserved.